



Product Bulletin

Use of 15KW Heat Kits on 3T FLEXX Air Handlers

Document #: TB-FLX-09152022

Date Issued: Sept. 15, 2022

Author: James McIntyre

Reference: FLEXX 3-ton Air Handlers with 15KW Electric Heat Kit

Product Group: FLEXX

Models Affected: FLEXX36HP230V1BH

Serial Number Range: All

Summary:


The location of the heat sequencer on the heat kit hinders the installation of a 15KW heat kit in model FLEXX36HP230V1BH.

Solution:

For the installation of the 15KW heat kit, please follow these steps:

1. Before work, please ensure the power has been disconnected.
2. Remove the two screws located at the top and bottom of the heat sequencer.
3. Using the two identical holes directly to the right, partially install the lower screw.
4. Slide the heat sequencer onto the lower screw.
5. Install the upper screw and tighten the lower screw.
6. Complete the installation of the heat kit as normal.

REFERENCE PHOTOS

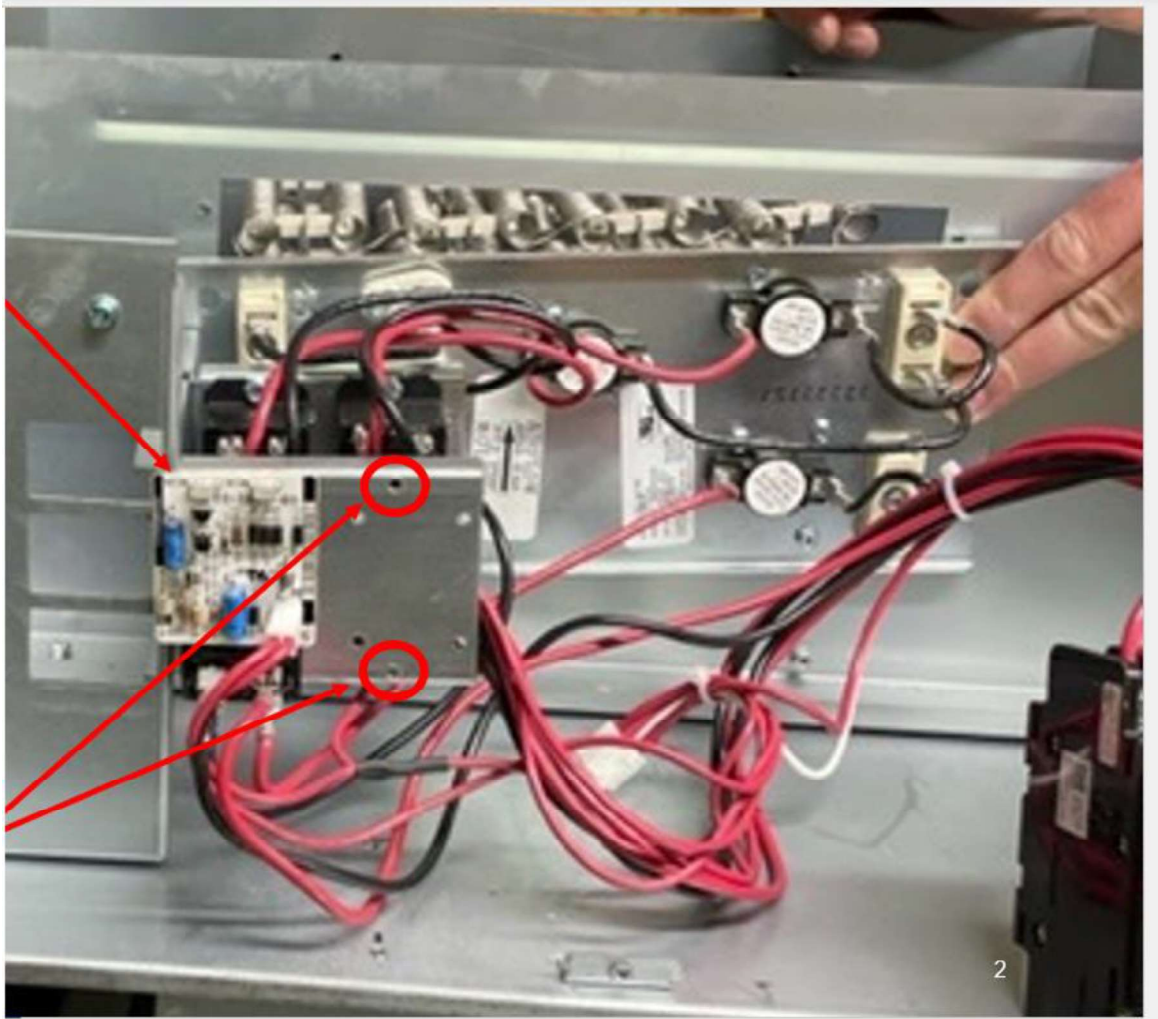

Sequencer has been moved and mounted using the two screws provided with the sequencer and the two pre-drilled screw holes on the right

