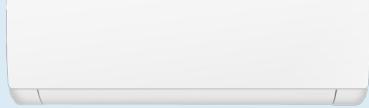


SUBMITTAL DATA

WZEN12HPJ132AH / WZEN12HPJ132AO
12000 BTU/H Wall Mounted Heat Pump System

Job Name	Location	Date	
Purchaser	Engineer		
Submitted to	For		
Unit Designation	Schedule No.		
			
YBE1FB1F	WZEN12HPJ132AH	WZEN12HPJ132AO	XE71 (Optional)

GENERAL FEATURES

- AHRI Certificate: [217452894](#)
- New R32 Refrigerant
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Wireless Remote with LCD Display
- Wired Controller Options
- A2L Sensors are not included
- Wi-Fi Included
- Low Ambient Cooling down to 0°F (Range 0°F to 118°F)
- Low Ambient Heating down to -13°F (Range -13°F to 75°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY



SYSTEM TYPE		HEAT PUMP			
Outdoor Model		WZEN12HPJ132AO			
Indoor Model		WZEN12HPJ132AH			
SYSTEM PERFORMANCE					
Cooling Capacity	Min - Max	Btu/h	2,388 - 12,710		
	Rated Capacity @95°F	Btu/h	12,000		
Heating Capacity	Min - Max	Btu/h	2,217 - 13,477		
	Rated Capacity @47°F	Btu/h	12,000		
	Rated Capacity @17°F	Btu/h	9,700		
	Rated Capacity @5°F	Btu/h	9,500		
SEER2		16.0			
EER2		8.55			
HSPF2		8.0			
COP @5°F		1.75			
Cooling Temperature Range	°F	0 - 118			
Heating Temperature Range	°F	-13 - 75			
Refrigerant Type	R32				
INDOOR UNIT		WZEN12HPJ132AH			
Air flow (Min - Max)	CFM	159 - 365			
Sound Pressure Level (Min - Max)	dB(A)	22 - 42			
Dehumidification	pt/hr	2.96			
External Dimensions (W x H x D)	in	32-51/64 x 10-15/64 x 7-9/16			
Package Dimension (L x W x H)	in	34-23/32 x 13-5/64 x 10-7/16			
Net Weight	lbs	17.6			
Gross Weight	lbs	20.9			
OUTDOOR UNIT		WZEN12HPJ132AO			
Compressor Type	GREE G20 / SINGLE CYLINDER / 1 - STAGE INVERTER				
Sound Pressure Level	dB(A)	52			
External Dimensions (W x H x D)	in	28-13/16 x 21-27/32 x 12-63/64			
Package Dimension (L x W x H)	in	31-17/64 x 14-51/64 x 24-7/32			
Net Weight	lbs	56.2			
Gross Weight	lbs	61.7			
REFRIGERANT PIPING					
Refrigerant Charge - R32	oz	22.9			
Additional Charge	oz/ft	0.2			
Line Set Size (Liquid - Gas) - Flared Connections	in	1/4 - 3/8			
Pre-Charge Length	ft	25			
Pipe Length (Min - Max)	ft	10 - 66			
Max. Pipe Elevation	ft	39			
ELECTRICAL					
Power Supply	208-230V / 1Ph / 60Hz (Powered by the Outdoor Unit)				
Voltage Range (Min - Max)	VAC	187 - 253			
Rated Current - Cooling	A	7			
Rated Current - Heating	A	8			
MOCP	A	15			
MCA	A	12			
Main Power Wire Size	AWG	Per Local Code			
Interconnecting Wire Size	AWG	14 / 4			

DIMENSIONS

INDOOR UNIT

Unit: inch


WZEN12HPJ132AH	
DIMENSIONS	
W	32 51/64
H	10 15/64
D	7 9/16

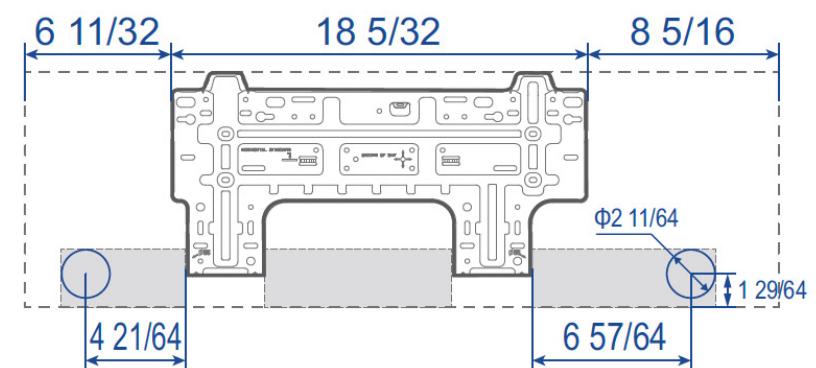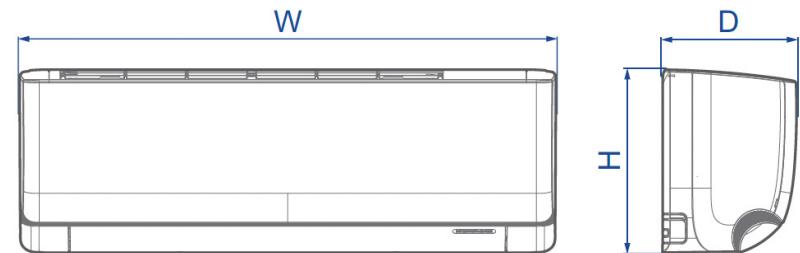

OUTDOOR UNIT

Unit: inch


WZEN12HPJ132AO	
DIMENSIONS	
A	26 37/64
B	28 13/16
C	2 9/16
D	6 27/64
E	21 27/32
F	17 29/32
G	12 13/64
H	12 63/64

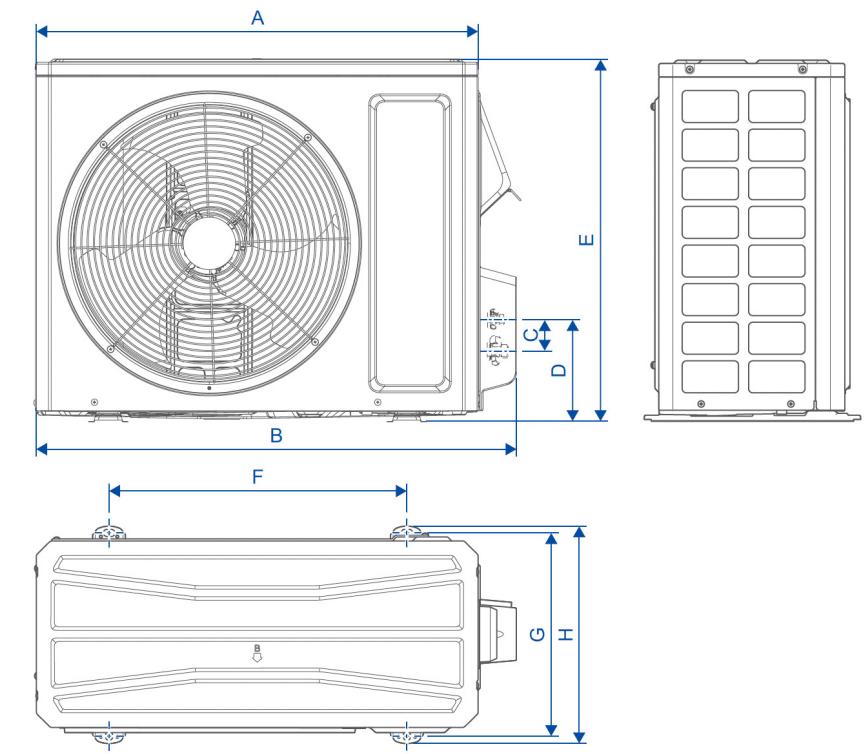

CLEARANCES


INDOOR UNIT

Minimum clearance

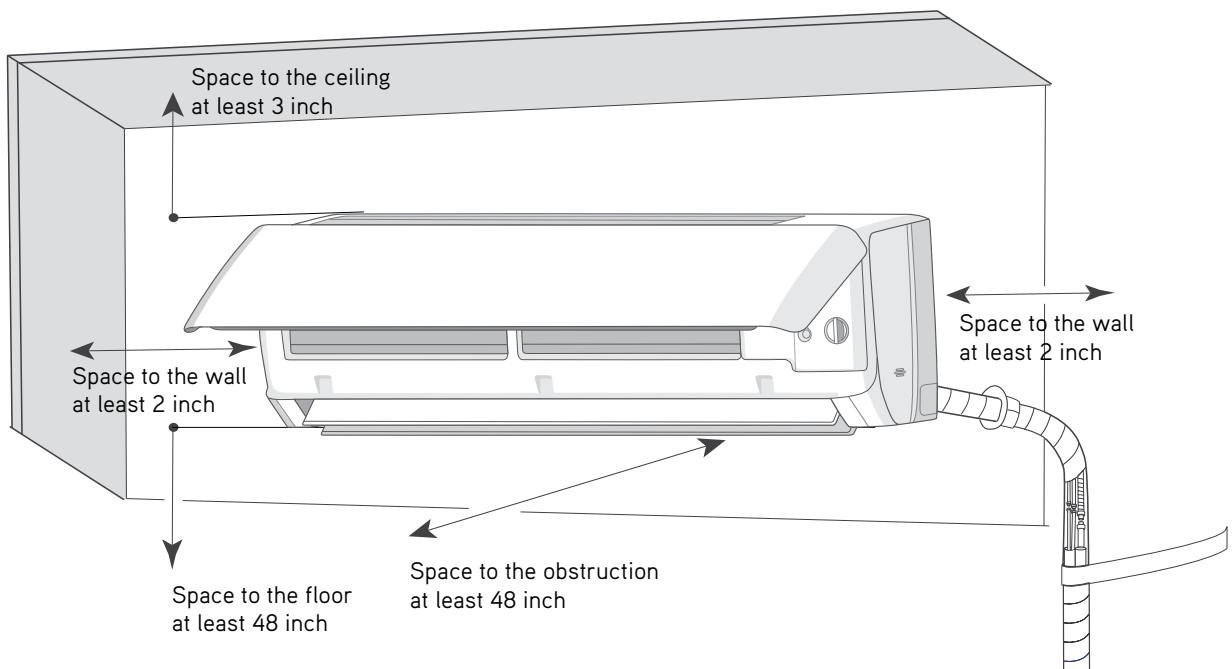


OUTDOOR UNIT

Minimum clearance

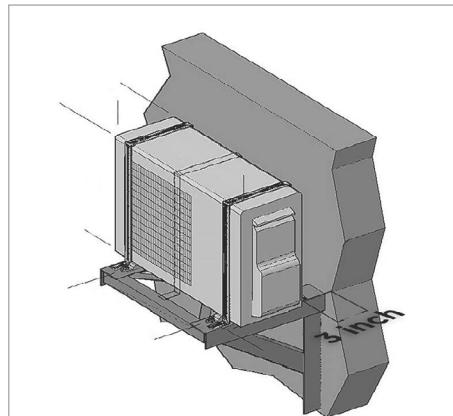

NOTE:

If bottom of the unit is free of airflow obstructions similar to the mounting bracket figure, the clearance to the wall on the back can be reduced to 3 inches.

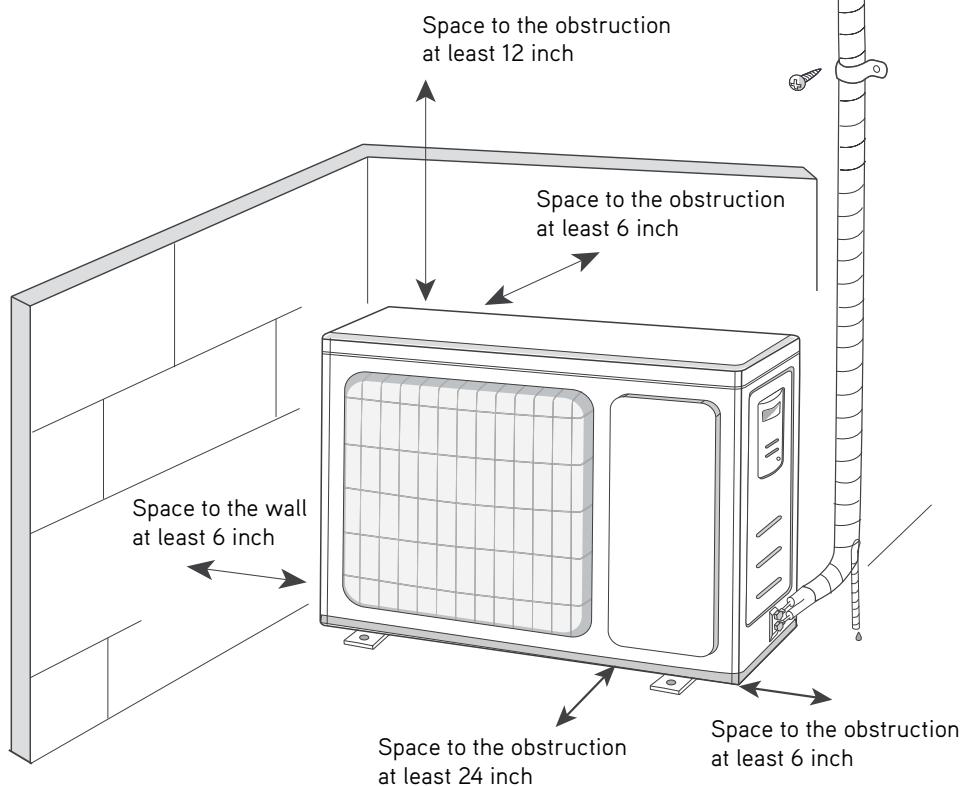

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

GREECOMFORT.COM/SYSTEM-DOCUMENTATION