

SUBMITTAL DATA

CAS09HP230V1R32AH with Multi R32
9000 BTU/H Cassette

Job Name	Location	Date
Purchaser	Engineer	
Submitted to	For	
Unit Designation	Schedule No.	
  		
YBE1FB5F	CAS09HP230V1R32AH	XE72-44/E

GENERAL FEATURES

- Compact and Quiet Design
- 4 - Way Discharge Air
- Swing Louver Control
- Internal Condensate Drain Pump
- Wireless Remote with LCD Display Included
- XE72-44/E Wired Controller Included
- Low Ambient Cooling and Heating
- Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested
- New R32 Refrigerant with Refrigerant Sensor

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY

			HEAT PUMP
Indoor Model			CAS09HP230V1R32AH
SYSTEM PERFORMANCE			
Cooling Capacity	Nominal	Btu/h	9,000
	Rated Capacity @95°F	Btu/h	
Heating Capacity	Nominal	Btu/h	9,000
	Rated Capacity @47°F	Btu/h	
	Rated Capacity @17°F	Btu/h	
	Rated Capacity @5°F	Btu/h	
SEER2		System Performance Based on the Connected Outdoor Unit Performance	
EER2			
HSPF2			
COP @5°F			
Cooling Temperature Range	°F		
Heating Temperature Range	°F		
Refrigerant Type		R32	
INDOOR UNIT			CAS09HP230V1R32AH
Air flow (Min-Max)	CFM	206 - 330	
Sound Pressure Level (Min - Max)	dB(A)	29 - 40	
Dehumidification	pt/hr	2.96	
External Dimensions (L x D x H)	in	22-7/16 x 22-7/16 x 10-7/16	
Package Dimension (L x W x H)	in	27-31/64 x 25-45/64 x 11-39/64	
Net Weight	lbs	37.5	
Gross Weight	lbs	48.5	
CASSETTE GRILLE (REQUIRED)			GREETF05
Grille Dimension (L x D x H)	in	24-13/32 x 24-13/32 x 1-7/8	
Package Dimension (L x W x H)	in	27-19/32 x 27-19/32 x 4-59/64	
Weight (Net / Gross)	lbs	6.6 / 9.9	
REFRIGERANT PIPING			
Line Set Sized by the Indoor Unit (Liquid - Gas) - Flared Connections	in	1/4 - 3/8	
ELECTRICAL			
Power Supply		208-230V / 1Ph / 60Hz (Powered by the Outdoor Unit)	


FEATURES & FUNCTIONS SUMMARY	
Wired Controller Interface	Yes
WiFi Included	No
Indoor Fan Type	Centrifugal
Multi Fan Speeds	7 Speeds
Indoor Unit Display	Yes
Auxiliary Electrical Heater	No
Ventilation (Outdoor Air)	No
REMOTE CONTROLLER FUNCTIONS	
Auto Mode	Yes
Auto Fan	Yes
Auto Swing (Horizontal Auto Swing)	No
Auto Swing - 180° (Vertical Auto Swing)	Yes
Clock	Yes
Dry Mode	Yes
Dry Anti-Mildew (X-Fan) Mode	Yes
Energy Saving Mode	Yes
Dirty Filter Alert	No
Fan Speed Control (7 Speeds)	Yes
I Feel Function	Yes
Privacy Lock	Yes
Quiet Mode	Yes
Room Temperature Display	No
Sleep Mode	Yes
3 Sleep Mode Options	Yes
Timer Mode	Yes
Turbo Mode	Yes
Display On/Off Control	Yes
Freeze Guard Mode	Yes
Power Failure Mode	Yes

DIMENSIONS & CLEARANCES

INDOOR UNIT


Unit: inch

CAS09HP230V1R32AH	
DIMENSIONS	
A	24 13/32
B	22 53/64
C	22 7/16
D	19 7/8
E	21 21/32
F	10 7/16
G	5 33/64
H	20 55/64
I	20 55/64

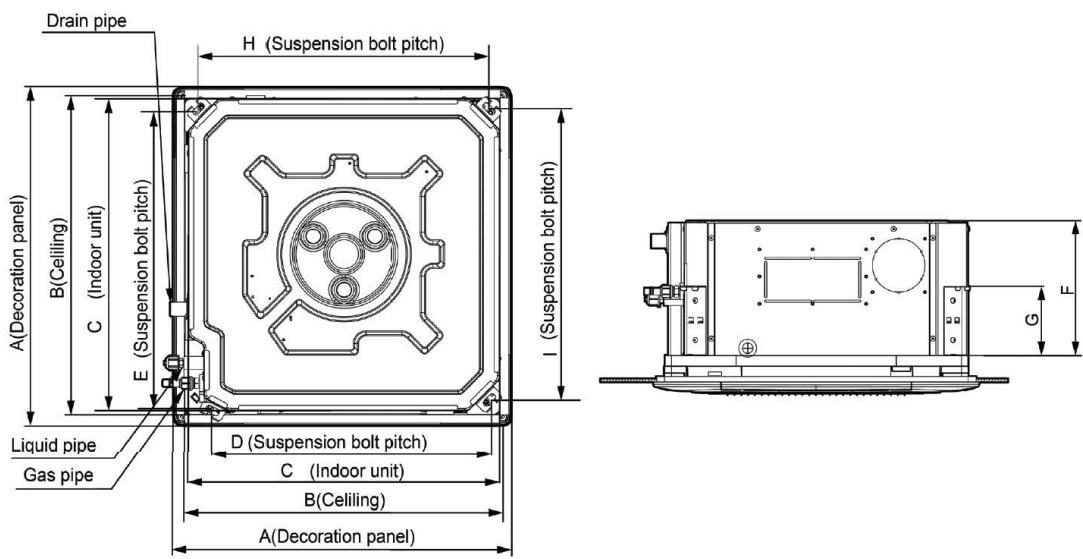

INDOOR UNIT

Minimum clearance

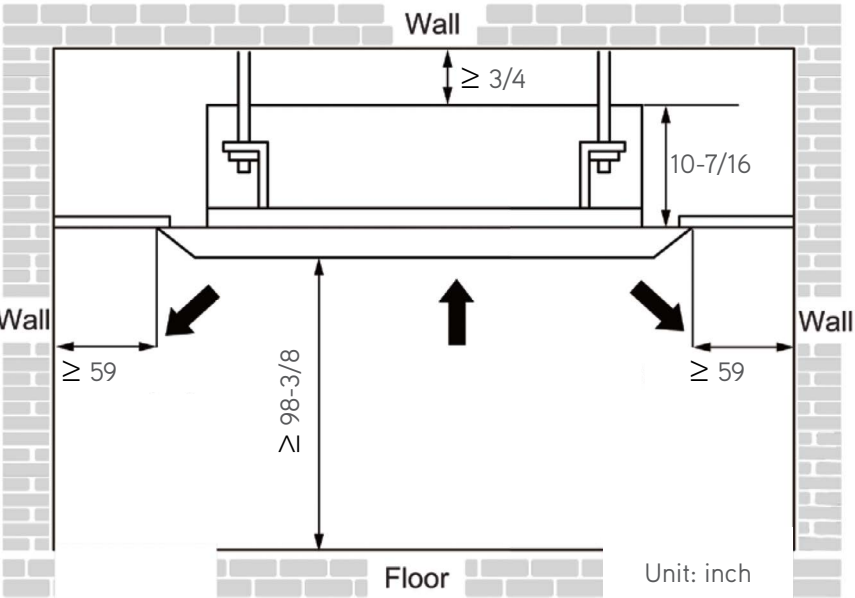

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

GREECOMFORT.COM/SYSTEM-DOCUMENTATION