


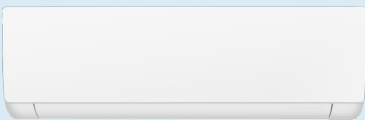

SUBMITTAL DATA

WZEN09HPL132AH / WZEN09HPL132AO
9000 BTU/H Wall Mounted Heat Pump System

Job Name	Location		Date
Purchaser	Engineer		
Submmited to	For		
Unit Designation	Schedule No.		

			
YBE1FB1F	WZEN09HPL132AH	WZEN09HPL132AO	XE71 (Optional)

GENERAL FEATURES

- AHRI Certificate: [217452893](#)
- New R32 Refrigerant
- High Efficiency DC Inverter Technology
- Compact and Quiet Design
- Wireless Remote with LCD Display
- Wired Controller Options
- A2L Sensors are not included
- Wi-Fi Included
- Low Ambient Cooling down to 0°F (Range 0°F to 118°F)
- Low Ambient Heating down to -13°F (Range -13°F to 75°F)
- Coil (Indoor and Outdoor) Copper Tube / Aluminum Fin
- Blue Colored Fin - 500 Hrs Salt Spray Tested

SPECIFICATIONS, FEATURES & FUNCTION SUMMARY



SYSTEM TYPE			HEAT PUMP		FEATURES & FUNCTIONS SUMMARY	
Outdoor Model			WZEN09HPL132AO		Inverter Type	G20
Indoor Model			WZEN09HPL132AH		Ultra Low Frequency Torque Control	Yes
SYSTEM PERFORMANCE					Power Factor Correction	Yes
Cooling Capacity	Min - Max	Btu/h	2,730 - 11,000		Basepan With Electric Heater	Yes
	Rated Capacity @95°F	Btu/h	9,100		Compressor With Electric Heater	Yes
Heating Capacity	Min - Max	Btu/h	2,390 - 13,000		Outdoor Fin Coating (Color:Blue)	Acrylic-Resin/Anti-Corrosive
	Rated Capacity @47°F	Btu/h	10,000		Intelligent Defrosting	Yes
	Rated Capacity @17°F	Btu/h	8,000		Force Defrosting	Yes
	Rated Capacity @5°F	Btu/h	7,000		Intelligent Preheating	Yes
SEER2			18.5		Low Voltage Startup	Yes
EER2			11.9		Memory/Power Failure Recovery	Yes
HSPF2			8.6		Self Diagnosis	Yes
COP @5°F			1.80		Wired Controller Interface	Yes
Cooling Temperature Range		°F	0 - 118		WiFi Included	Yes
Heating Temperature Range		°F	-13 - 75		Indoor Fan Type	Crossflow
Refrigerant Type			R32		Multi Fan Speeds	7 Speeds
INDOOR UNIT			WZEN09HPL132AH		Indoor Unit Display	Yes
Air flow (Min - Max)		CFM	165 - 294		Auxiliary Electrical Heater	No
Sound Pressure Level (Min - Max)		dB(A)	23 - 40		Ventilation (Outdoor Air)	No
Dehumidification		pt/hr	1.69		REMOTE CONTROLLER FUNCTIONS	
External Dimensions (W x H x D)		in	32-51/64 x 10-15/64 x 7-9/16		Auto Mode	Yes
Package Dimension (L x W x H)		in	34-23/32 x 13-5/64 x 10-7/16		Auto Fan	Yes
Net Weight		lbs	17.6		Auto Swing (Horizontal Auto Swing)	No
Gross Weight		lbs	20.9		Auto Swing (Vertical Auto Swing)	Yes
OUTDOOR UNIT			WZEN09HPL132AO		Clock on Remote Controller	Yes
Compressor Type			GREE G20 / SINGLE CYLINDER / 1 - STAGE INVERTER		Dry Mode	Yes
Sound Pressure Level		dB(A)	51		Dry Anti-Mildew (X-Fan) Mode	Yes
External Dimensions (W x H x D)		in	28-13/16 x 21-27/32 x 12-63/64		Energy Saving Mode	Yes
Package Dimension (L x W x H)		in	31-17/64 x 14-51/64 x 24-7/32		Dirty Filter Alert	No
Net Weight		lbs	55.1		I Feel Function	No
Gross Weight		lbs	60.6		Lock on Remote Controller	Yes
REFRIGERANT PIPING					Quiet Mode	Yes
Refrigerant Charge - R32		oz	17.6		Room Temperature Display	Yes
Additional Charge		oz/ft	0.2		Sleep Mode	Yes
Line Set Size (Liquid - Gas) - Flared Connections		in	1/4 - 3/8		Timer Mode	Yes
Pre-Charge Length		ft	25		Turbo Mode	Yes
Pipe Length (Min - Max)		ft	10 - 66		Display On/Off Control	Yes
Max. Pipe Elevation		ft	39		Freeze Guard Mode (46°F)	Yes
ELECTRICAL						
Power Supply			115V / 1Ph / 60Hz (Powered by the Outdoor Unit)			
Voltage Range (Min - Max)		VAC	103 - 126			
Rated Current - Cooling		A	12.5			
Rated Current - Heating		A	15.4			
MOCP		A	20			
MCA		A	19			
Main Power Wire Size		AWG	Per Local Code			
Interconnecting Wire Size		AWG	14 / 4			

DIMENSIONS

INDOOR UNIT

Unit: inch


WZEN09HPL132AH	
DIMENSIONS	
W	32 51/64
H	10 15/64
D	7 9/16

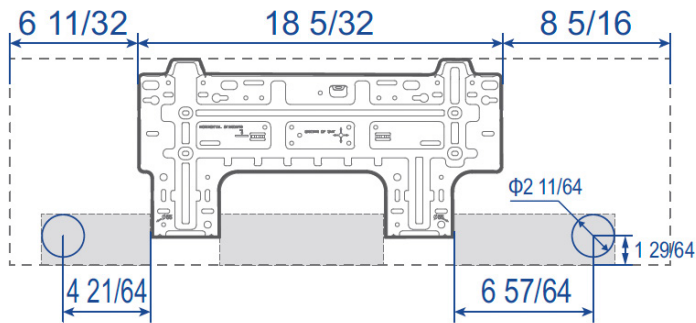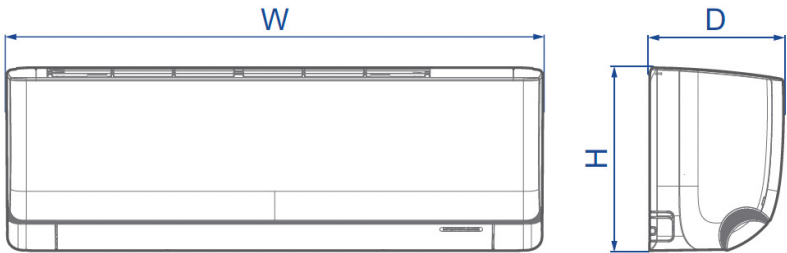

OUTDOOR UNIT

Unit: inch


WZEN09HPL132AO	
DIMENSIONS	
A	26 37/64
B	28 13/16
C	2 9/16
D	6 27/64
E	21 27/32
F	17 29/32
G	12 13/64
H	12 63/64

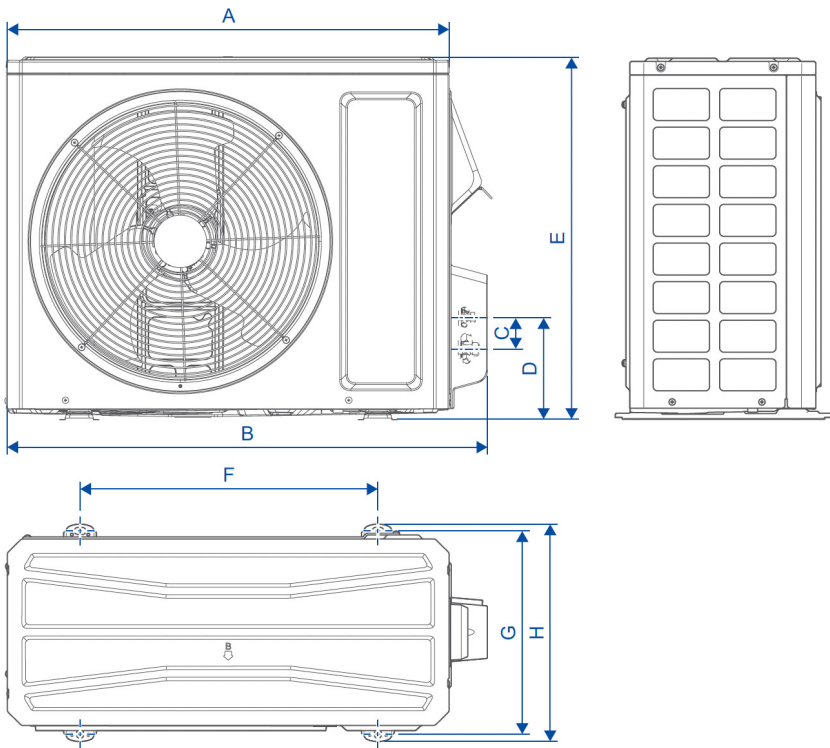

CLEARANCES



INDOOR UNIT

Minimum clearance

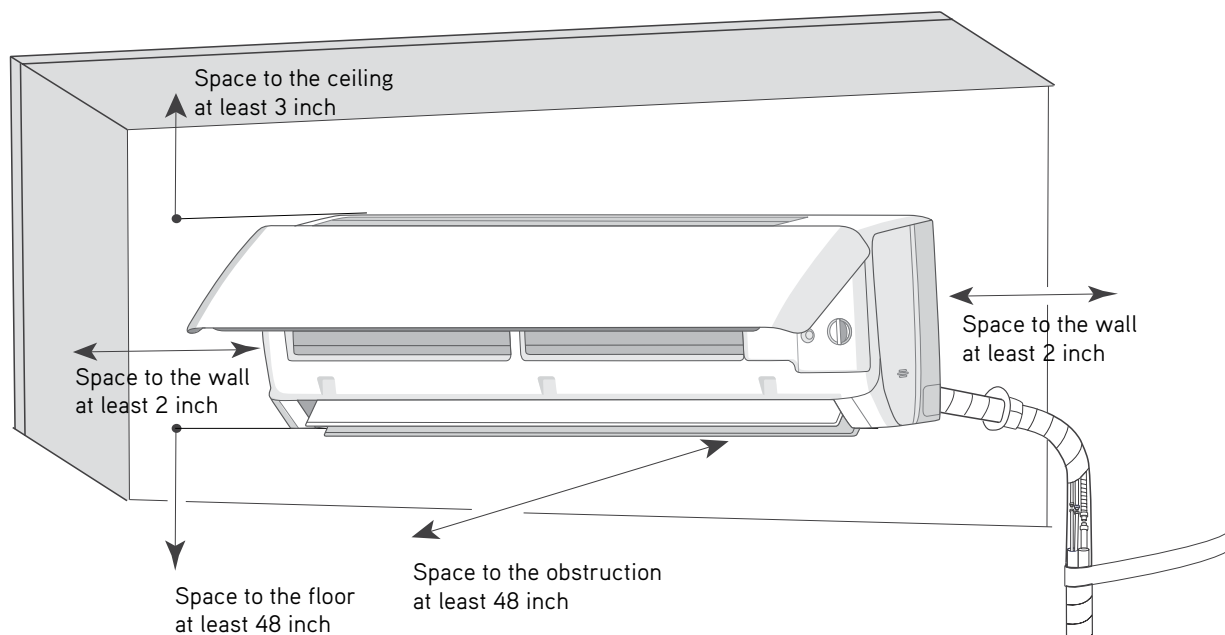

OUTDOOR UNIT

Minimum clearance

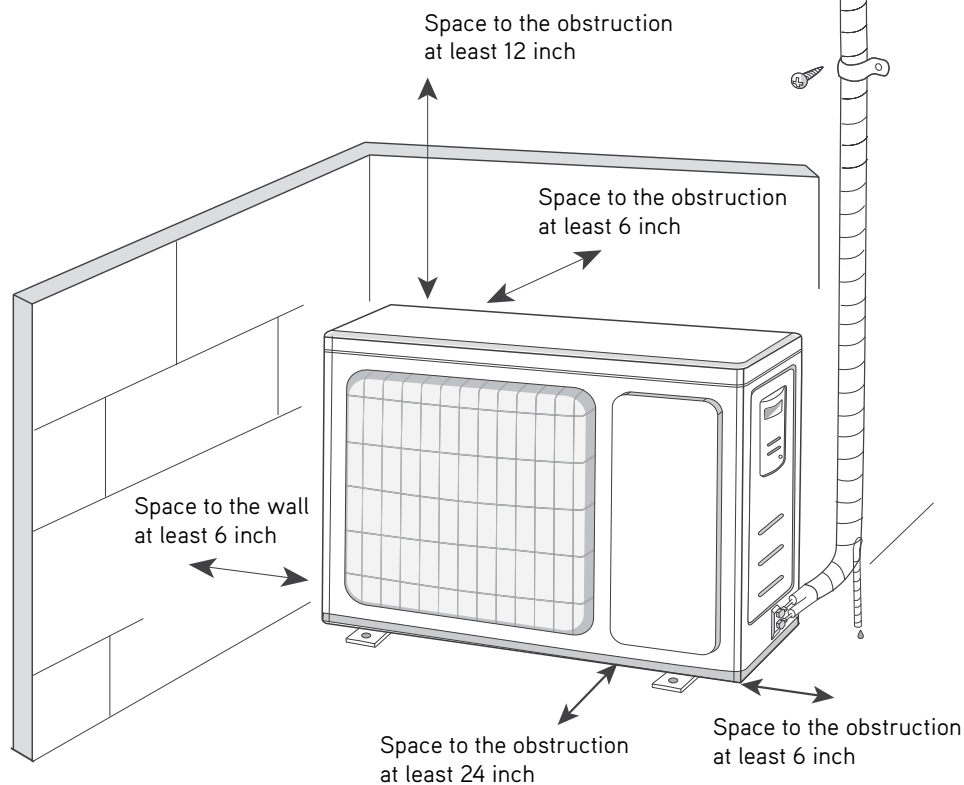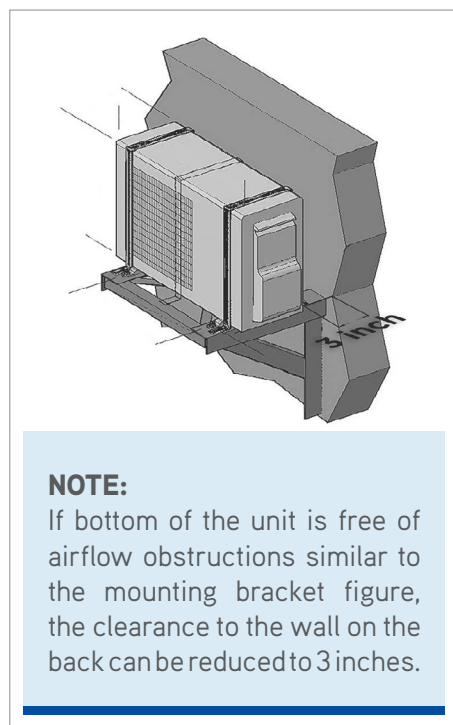

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All Rights reserved.

GREECOMFORT.COM/SYSTEM-DOCUMENTATION